(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 3 February 2005 (03.02.2005)

PCT

(10) International Publication Number WO 2005/010871 A1

(51) International Patent Classification7:

G11B 7/00

(21) International Application Number:

PCT/AU2004/000987

(22) International Filing Date:

23 July 2004 (23.07.2004)

(25) Flling Language:

English

(26) Publication Language:

English

(30) Priority Data: 2003903802

23 July 2003 (23.07.2003) AU

(71) Applicant (for all designated States except US): BAND-WIDTH FOUNDRY PTY LTD [AU/AU]; 102 National Innovation Centre, Australian Technology Park, Eveleigh, New South Wales 1430 (AU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BURYAK, Alexander [AU/AU]; 53 Coronga Crescent, Killara, New South Wales 2071 (AU). KOLOSSOVSKI, Kazimir [RU/AU];

72 Lachlan Street, Macquarie, Australian Capital Territory 2614 (AU), STEPANOV, Dmitril, Yu [RU/AU]; 7/126 Croydon Avenue, Croydon Park, New South Wales, 2133 (AU).

- (74) Agent: FREEHILLS CARTER SMITH BEADLE; Level 32, MLC Centre, 19-29 Martin Place, Sydney, New South Wales 2000 (AU).
- (B1) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DB, DK, DM, DZ, EC, EB, EG, ES, FI, GB, GD, GB, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, OH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) THE: OPTICAL DATA CARRIER SYSTEM

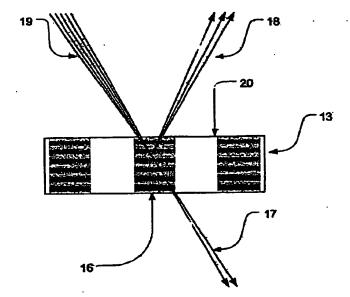

(57) Abstract: The present invention provides a method of holographically storing data as in a series of grating structures including m-level coded elements in an optical data carrier, wherein $m \ge 2$, the method comprising: forming a grating sampling function as a direct sum of N partial grating sampling functions, each partial grating sampling function having a phase (ϕn) and amplitude (d_n) , wherein each d_n has m possible values.

2005/010871 A1